

Lithium Iron (LiFePO₄) Battery

HP-LFP-48100(48V 100Ah)

Features

Longer Cycle Life: Offers up to 10 times longer cycle life and five times longer float/calendar life than lead acid battery, helping it minimize replacement cost and reduce total cost of ownership.

Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.


Wider Temperature Range: -20 ~ 60°C

Superior Safety: Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

Multi Protocol: The battery work well with multiple brands of inverters.



Dimension-mm

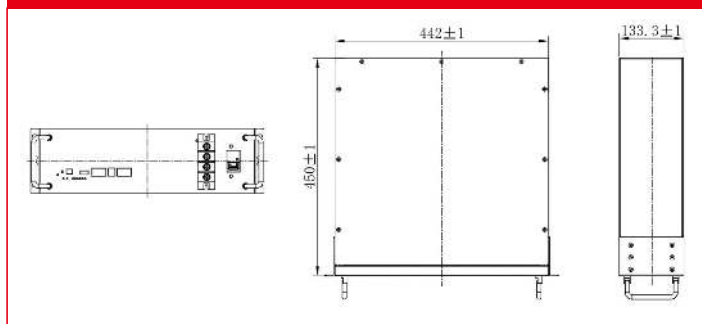

Application

- Indoor/outdoor telecom base stations
- Household energy storage system
- Smart transportation backup power supply


Specification

Basic Parameters	Rated Voltage	48V
	Rated Capacity	100Ah
	Rated Energy	4800wh
	Combination Method	15S1P
	Cycle Life	≥6000 cycles @80%DOD
	Self Discharge	1%/months
	Efficiency of Charge	≥97%
	Efficiency of Discharge	≥98%
Charge	Charge Voltage	54.0V
	Charge Current (Recomm.)	20A
	Charge Current (Max.)	100A
Discharge	Discharge Cut-off Voltage	40.0V
	Discharge Current(Recomm.)	50A
	Pulse Current	120A (3S)
Environment	Charge Temperature	0°C to 60°C
	Discharge Temperature	-20°C to 60°C
	Humidity	5% to 95%
Physical Characteristics	IP Class	IP30
	Case Material	Metal
	Dimensions (mm)	442*133*450mm
	Weight (kg)	43kg
	Others(optional)	Anti-theft function, LCD display
Inverter Brands for HPOWER Lithium Batteries	Victron, Deye, Growatt, GOODWE, GINLONG, LUXPOWER, Voltronic Power, SOFAR SOLAR , SRNE, Studer Innotec, SMA Solar Technology, SMK solar, MUST,ETC.	


Lithium Iron (LiFePO₄) Battery

HP-LFP-48100(48V 100Ah)


Different Rate Discharge Curve (25°C)

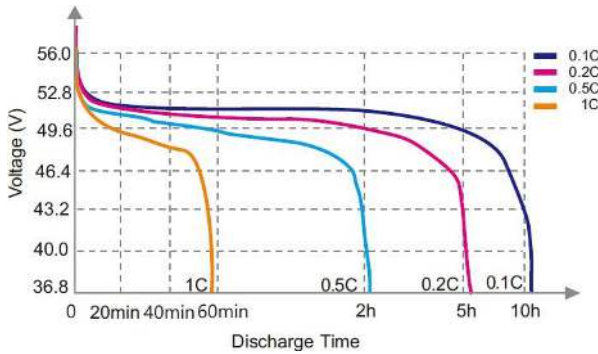


Different Temperature Discharge Curve (0.5C)

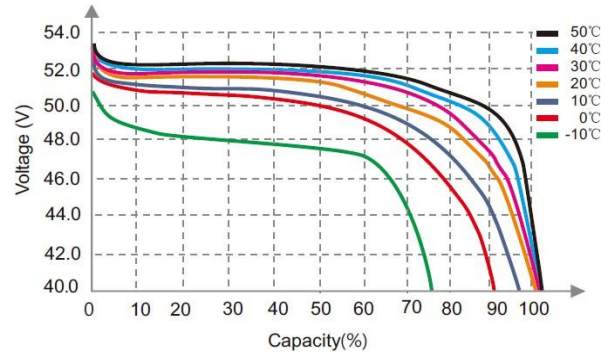


State of Charge Curve (0.5C, 25°C)

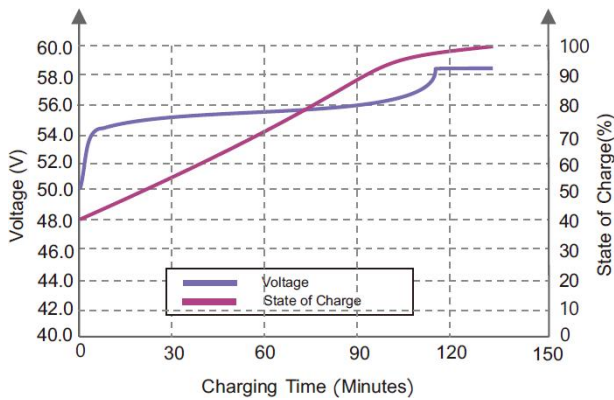

Charging Characteristics (0.5C, 25°C)

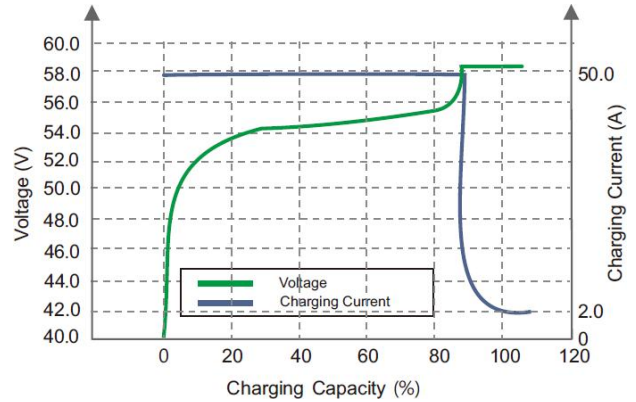

Different DOD Discharge Cycle Life Curve (0.5C)

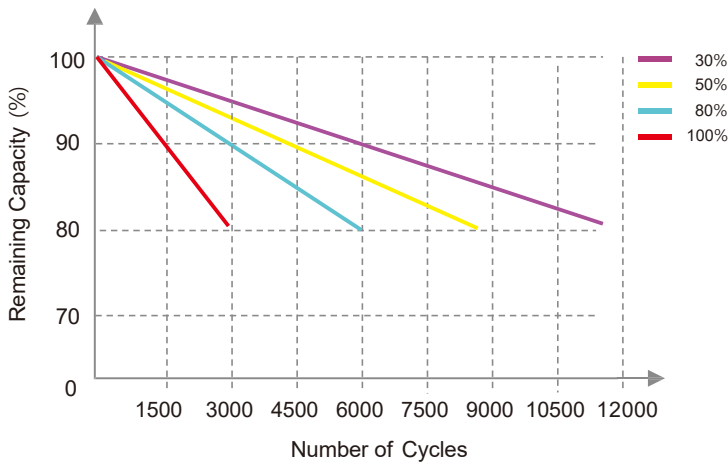

Different Temperature Self Discharge Curve

